

(19)

Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 689 850 B1

(12)

# EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention  
of the grant of the patent:  
25.09.1996 Bulletin 1996/39

(51) Int. Cl.<sup>6</sup>: A61M 25/00, A61M 25/01

(21) Application number: 94107357.9

(22) Date of filing: 11.05.1994

(54) Docking assembly for the extension of a guidewire

Halteverbindung für die Verlängerung eines Führungsdrahtes

Assemblage de retenue pour l'extension d'un fil de guidage

(84) Designated Contracting States:  
AT BE CH DE DK ES FR GB IE IT LI NL SE

(43) Date of publication of application:  
03.01.1996 Bulletin 1996/01

(73) Proprietor: SCHNEIDER (EUROPE) AG  
CH-8180 Bülach (CH)

(72) Inventor: Häni, Robert  
CH-8918 Untertunkhofen (CH)

(74) Representative: Misrachi, Alfred  
Alfred MISRACHI,  
Ingénieur-conseil,  
Chemin de la Plantaz 15  
1024 Ecublens (CH)

(56) References cited:

WO-A-92/18051	WO-A-93/03664
US-A- 5 113 872	US-A- 5 139 032
US-A- 5 197 486	US-A- 5 247 942

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

## Description

This invention relates to vascular procedures and more particularly to a docking assembly for the extension of a guidewire with an extension wire comprising socket means and plug means for axial engagement into said socket means.

It is common practice to use a guidewire for the placement of a catheter in vascular procedures such as angioplasty. A guidewire typically is slightly longer than the catheter with which it is used, whereby a relatively short portion of the guidewire protrudes proximally from the catheter when the catheter is in place. If it becomes necessary to exchange the catheter, for instance to increase the balloon size in an angioplasty procedure, the guidewire must be removed and replaced by an exchange wire which is about twice the length of the catheter in order to allow withdrawal of the catheter and insertion of a new catheter over the exchange wire. However, this technology seriously complicates and slows down the vascular procedure, and there has been several attempts to attach an extension wire to the initial guidewire in order to eliminate the need of a separate exchange wire.

The document EP 0321796 A2 describes an extendable guidewire system comprising a main guidewire section and a guidewire extension section and a connection therebetween including a tubular member fixed to the end of one of the guidewire sections and a male member arranged on the end of the other guidewire section which has a maximum radial dimension which is greater than the inner diameter of the tubular member, whereby the male member may be inserted into the tubular member to releasably secure the two guidewire sections together. According to a first embodiment, the male member is shaped into an undulating or sinusoidal shape. According to a second embodiment, the male member is provided with a smaller diameter portion having radial protrusions.

Hence, deformation of the undulating shape of the male member or relative deformation of the male member with radial protrusions provide for a friction fit of the male member into the tubular member and the two guidewire sections may be connected or disconnected as desired. The need of radial deformation to generate the friction fit requires a distinct difference in diameter between the inner diameter of the tubular member and that of the male member. Therefore, the male member has to be extremely thin and it may be easily bent inadvertently, thereby spoiling the guidewire section to which it belongs. Furthermore, as the insertion of the male member into the tubular member is made against friction forces, these forces may cause buckling, and even total kinking in case of a male member with sinusoidal shape, also spoiling the corresponding guidewire section.

US Patent N° 4917103 shows a guidewire system in which a steel tubular connector is attached to the proximal end of a guidewire and a reduced diameter

steel tip is attached to the distal end of an extension wire. The contrary is also possible, with the tubular connector on the extension wire and the reduced diameter tip on the guidewire. For connecting the extension wire to the guidewire, the reduced diameter tip is inserted into the tubular connector and the assembly of both the tip and connector is crimped by means of appropriate pliers used as a crimping tool. Mechanical attachment of both parts is thus obtained by displacing a segment of both the tubular connector and tip inserted therein laterally of their common axis in what may be considered as a generally U-shaped configuration. The extent of lateral displacement is of course selected so that it will not interfere too much with the smooth advancement of a catheter over the point of assembly. To release or disconnect the assembly of guidewire and extension wire, it is necessary to cut the guidewire distally of the crimp or to break the connection at the location of the crimped tubular connector and tip assembly. The system is thus a permanent connection, and when released by cutting the guidewire or breaking the connector and tip assembly, both the guidewire and extension wire are spoiled, which makes it that the system is definitely not reusable. In addition, the cutting-out of the guidewire or the breaking of the connector and tip assembly may prove difficult or even impossible without some special cutting tool. And this adds to the fact that the need to use a crimping tool for the mechanical attachment of the tubular connector and tip renders the system dependent from the proper use of the crimping tool.

US Patent N° 5188621 disclosed an extendable guidewire assembly in which the guidewire has a tapered proximal end, the extension wire has a tapered distal end, and a polymeric tubular sleeve is affixed concentrically about one of either the proximal end of the guidewire or the distal end of the extension wire. The sleeve is so made as to have its lumen expanding radially when the sleeve is under axial compression and to contract radially when the sleeve is under axial tension; furthermore, the lumen of the sleeve has a diameter which is smaller than the untapered diameter of the wire to which the sleeve is not fixedly attached. To connect the assembly, the tapered end of the wire to which the sleeve is not fixedly attached is inserted into the sleeve until a tight friction fit between the sleeve and the tapered end is achieved. Because of the so-called "Chinese finger tube" fit, the connection between the sleeve and tapered end inserted therein will be verified upon applying axial tension to both wires; disconnection will be achieved only by placing a gripping force on the end face of the sleeve in which is inserted the tapered end of the wire not fixedly attached to the sleeve, and pulling said tapered end from the lumen of the sleeve. This assembly is thus providing a selfacting connection which needs however manipulations and skill to be disconnected.

US Patent N° 5113872 describes a guidewire extension system comprising an extension guidewire adapted to be releasably connected to a proximal end of

an initial guidewire. The distal end of the extension guidewire is mounted in a tube in which is located an open pitch flat wire coiled spring one end of which is placed over the distal end of the extension guidewire and welded thereto; the other end of the coiled spring extends freely in the tube and a detent arranged at the end of the tube prevents the free end of the spring from being moved out of the tube. To achieve connection of the extension guidewire to the initial guidewire, the ground down proximal end of the initial guidewire is inserted into the tube and urged therein until it engages the coiled flat wire spring and bottoms against the distal end of the extension guidewire. As the proximal end of the initial guidewire is inserted into the coils of the flat wire coiled spring, the coils are forced to slightly uncoil so that they can receive the outer diameter of the proximal end of the initial guidewire. Then, any axial force pulling the proximal end of the initial guidewire away from the coiled spring causes the coils around said proximal end to move towards a smaller diameter and that tendency establishes a connection between the coils and proximal end. Any pull on the extension guidewire causes axial extension of the coiled spring, which results in a reduction of the diameter of the coils and greatly increases the locking forces of the coiled spring against the proximal end of the initial guidewire. To disconnect the assembly it is necessary to rotate the extension guidewire in order to loosen the grip of the coiled spring against the proximal end of the initial guidewire and at the same time to pull the initial guidewire out of engagement with the coils of the flat wire coiled spring. This assembly also provides a selfacting connection which is however dependent on manipulations and skills to be disconnected.

US Patent N° 5247942 shows a guidewire arrangement with swivel capacity, comprising a main part, an extension part, and a connector. The connector joins the main part to the extension part such that the main part and extension part may be rotated relative to each other. In one embodiment devised as an attachable extension, the arrangement provides for a socket attached to one of the parts and a plug attached to the other part (see Figure 6). The socket comprises a resilient bolting snap which protrudes inwardly of the socket. The plug is terminated by a cylindrical part forming a circular trap adapted to catch the resilient bolting snap of the socket. The assembly is obtained by inserting the plug into the socket whereby the cylindrical part of the plug lifts the resilient bolting snap which then falls down behind the cylindrical part to be caught by the cylindrical part to lock the assembly. As a result, this connection is not detachable. And for small diameters the socket and its resilient bolting snap is difficult to manufacture. It may be therefore difficult to achieve reliably reproducible snapping and locking forces on randomly combined guidewires and extensions. Figure 6 of US-A-5247942 discloses a docking assembly according to the features of the preamble of Claim 1.

It is an object of this invention to improve the possibilities of attaching an extension wire to a guidewire and to avoid the aforesaid drawbacks. Still a further object of the invention is to achieve attachment and release of a guidewire and extension wire by means of a docking assembly which is simple, inexpensive and easy to manufacture, which guarantees a smooth, efficient and repetitive operation for both connection and release of the guidewire and extension wire, and which does not require skills or troublesome manipulations, and which provides reliably reproducible locking and unlocking conditions on randomly combined guidewires and extensions.

To this effect, the docking assembly according to the invention complies with the definitions given in the claims.

As opposed to the aforesaid prior art systems, the docking assembly according to the invention constitutes a true lock providing a positive locking action and direct unlocking which do not rely on hazardous friction arrangements and the like. Full repetition of the locking and unlocking operations is assured. And such a positive action is obtained without any additional tools such as pliers and the like.

Docking is simply achieved by insertion of the bolt means into the socket means and mere pushing of said bolt means against the bias of the spring means of the plug means up to catching of the bolt means by the trap means under the bias of the spring means generating a force urging the bolt means into the trap means. To unlock the assembly, it suffices to pull the bolt means out from the socket means, which is merely the operation opposite to the docking; the force needed for locking and unlocking is therefore the same. No skills are needed and no time consuming manipulations, either. Just simple movements which do not require any special training.

As the spring force of the system is a result of the bending strength of the plug means, the assembly can easily reach the small dimensions required for guidewires and extension wires. Furthermore, the spring force of the system may be determined in a wide spectrum without tolerance or size problems, and it remains practically out of the influence of environmental conditions.

These and other features will become readily apparent from the following detailed description with reference to the accompanying drawings which show, diagrammatically and by way of example, a preferred embodiment of the invention and a variant thereof.

Figure 1 is a longitudinal sectional view of the socket means.

Figure 2 is a longitudinal view of the plug means.

Figures 3, 4 and 5 are longitudinal sectional views showing assembly of the elements of Figures 1 and 2.

Figure 6 is a longitudinal view showing the variant.

The socket means shown in Figure 1 are formed of a tubing 1 which is preferably made of the same material as the guidewire 2 for biocompatibility reasons. The

tubing 1 is engaged on the proximal end 3 of the guidewire 2 which has been appropriately ground to take up the thickness of the tubing 1. The tubing 1 is secured to the proximal end of the guidewire by a crimping 4. Other attachments are possible, such as for example by welding.

Inside the tubing 1 is a trap means formed by a substantially rigid shoulder 5 protruding on the inside of the socket means and which may be obtained by punching the wall of tubing 1. Preferably, this punching is made to define on shoulder 5 a supporting face 6 which is substantially oriented in a direction opposite to the free end 7 of tubing 1.

Also inside the tubing 1 is a ramp 8 which is some distance apart from shoulder 5, in the direction opposite to the free end 7 of tubing 1. Ramp 8 may also be made by punching the wall of tubing 1.

The plug means 9 shown in Figure 2 are formed by grinding the distal end of extension wire 10. Extension wire 10 may be made of stainless steel or other alloys typically employed in the art. Instead of grinding the distal end of extension wire 10, it is however possible to have plug means 9 fitted to the appropriately ground distal end of extension wire, for example by crimping or welding.

Plug means 9 include a resilient longitudinal shaft 11 having a narrower extension 12 terminating as a bolt means 13. Junction of shaft 11 with the extension wire 10 acts as a shoulder or abutment 14.

Figures 3, 4 and 5 illustrate the assembly of plug means 9 and tubing 1. The bolt 13 is initially inserted into the free end 7 of tubing 1 and the plug means 9 are merely pushed until the fore-end of bolt 13 encounters shoulder 5 and ramp 8.

As shown in Figure 4, ramp 8 cooperates with shoulder 5 to incline upwardly bolt 13 and direct it through the constriction formed by ramp 8 and shoulder 5. This inclination of bolt 13 causes the narrow extension 12 to bend arcuately as shown in Figure 4, and therefore the inclination of bolt 13 occurs against the resilient bias of shaft 11 and its narrow extension 12.

Once the rear end of bolt 13 has exceeded the edge of shoulder 5 the resiliency of shaft 11 and its narrow extension 12 sets up again the bolt 13 the rear end of which bears against supporting face 6 of shoulder 5, as shown in Figure 5. At that stage, abutment 14 at the junction of shaft 11 with the extension wire 10 bears against the free end 7 of tubing 1 and prevents over engagement of the bolt 13 into the tubing 1, thereby avoiding needless play in the assembly.

Accordingly, the trap means 5 in the socket means 1 are catching the bolt means 13 and the spring means 11, 12 are generating a spring force which urges the bolt means into the trap means. Furthermore, as the spring means are formed by a length of the plug means 9, the spring force is a result of the bending strength of the length of the plug means 9.

Unlocking of the assembly is exactly the reverse operation and, due to its orientation, supporting face 6

of shoulder 5 gives way to the bolt 13, thereby avoiding any risk of hooking bolt 13 against shoulder 5.

Variants may be envisaged.

Instead of having the socket means affixed to the proximal end of the guidewire, and the plug means affixed to the distal end of the extension wire as shown in Figures 1 to 5, it is possible to have the socket means affixed to the distal end of the extension wire and the plug means affixed to the proximal end of the guidewire. It may be noted, however, that the arrangement shown in Figures 1 to 5 is preferred because it avoids having the tiny plug means at the proximal end of the guidewire and the resulting risk of damaging a balloon catheter at the engagement thereof over the guidewire. Furthermore, the presence of the socket means at the proximal end of the guidewire avoids further treatment thereof such as for instance polishing, and also gives a greater handiness for operating the proximal end of the guidewire.

A further variant provides for suppressing the shoulder 14 as a specific abutment limiting the engagement of bolt 13 into the tubing 1, the bolt 13 being then relatively free to advance into the tubing 1 until it encounters the proximal end 3 of the guidewire.

Another variant suppresses the ramp 8, whereby directing and positioning of the bolt into the tubing will be achieved by a greater diameter of the shaft 11 in order to get a drive from the tubing 1. Figure 6 shows this configuration with the same elements bearing the same reference numerals as in Figures 1 to 4, and enlarged shaft 211. Here again, the trap means formed by the shoulder 5 protruding inside the socket means 1 are catching the bolt means 13, and the spring means 211, 12 are generating a spring force which urges the bolt means 13 into the trap means. And due to the spring means formed by a length of the plug means 9, the spring force is also a result of the bending strength of the length of the plug means 9.

According to a further variant, the shoulder 5 may have an edge 6 which is oriented otherwise than for giving way to the bolt 13, this function, if needed, being assured by the shape of the bottom of the bolt 13.

#### Claims

1. A docking assembly for the extension of a guidewire (2) with an extension wire (10), comprising socket means (1), plug means (9) for axial engagement into said socket means, bolt means (13) on said plug means (9), and trap means (5) in said socket means (1) for catching said bolt means (13), characterized in that it comprises spring means (11, 211, 12) on said plug means generating a spring force to urge the bolt means (13) into the trap means (5).
2. A docking assembly according to claim 1, characterized in that the spring means (11, 211, 12) are formed by a length of the plug means (9) whereby

the spring force is a result of the bending strength of the length of the plug means (9).

3. A docking assembly according to claim 1 or 2, characterized in that the trap means (5) are formed by a shoulder (5) protruding on the inside of the socket means.
4. A docking assembly according to claim 3, further comprising ramp means (8) in said socket means (1) cooperating with said shoulder (5) for directing said bolt means (13) into the socket means (1) against the bias of said spring means (11, 12) and for thereafter positioning said bolt means (13) towards said shoulder (5) under the bias of said spring means (11, 12).
5. A docking assembly according to claim 3 or 4, wherein said shoulder (5) has a supporting face (6) for said bolt means (13) which is substantially way giving to said bolt means.
6. A docking assembly according to any of claims 1 to 5, further comprising abutment means (14) on said plug means (9) for limiting engagement of said bolt means (13) into said socket means (1).

#### Patentansprüche

1. Kopplungsanordnung für die Verlängerung eines Führungsdrahtes (2) mit einem Verlängerungsdraht (10), umfassend Hülsenmittel (1), Steckmittel (9) für den axialen Eingriff in die Hülsenmittel, Riegelmittel (13) an den Steckmitteln (9) und Fallenmittel (5) in den Hülsenmitteln (1) zum Ergreifen der Riegelmittel (13), dadurch gekennzeichnet, dass sie Federmittel (11, 211, 12) an den Steckmitteln umfasst, welche eine Federkraft erzeugen, um die Riegelmittel (13) in die Fallenmittel (5) zu zwingen.
2. Kopplungsanordnung nach Anspruch 1, dadurch gekennzeichnet, dass die Federmittel (11, 211, 12) von einem Abschnitt der Steckmittel (9) gebildet werden, wodurch sich die Federkraft aus der Biegefestigkeit des Abschnitts der Steckmittel (9) ergibt.
3. Kopplungsanordnung nach Anspruch 1 oder 2, dadurch gekennzeichnet, dass die Fallenmittel (5) von einer Schulter (5) gebildet werden, die an der Innenseite der Hülsenmittel vorspringt.
4. Kopplungsanordnung nach Anspruch 3, die des weiteren Rampenmittel (8) in den Hülsenmitteln (1) umfasst, welche mit der Schulter (5) zusammenwirken, um die Riegelmittel (13) gegen die Vorbelastung der Federmittel (11, 12) in die Hülsenmittel (1) zu lenken und um anschließend die Riegelmittel (13) unter der Vorbelastung der Federmittel (11, 12) zur Schulter (5) hinzubewegen.

5. Kopplungsanordnung nach Anspruch 3 oder 4, wobei die Schulter (5) eine Stützfläche (6) für die Riegelmittel (13) aufweist, die im wesentlichen die Riegelmittel vorbeilässt.
6. Kopplungsanordnung nach einem der Ansprüche 1 bis 5, die des weiteren Anschlagmittel (14) an den Steckmitteln (9) zur Begrenzung des Eingriffs der Riegelmittel (13) in die Hülsenmittel (1) umfasst.

#### Revendications

1. Assemblage de retenue pour l'extension d'un fil de guidage (2), avec un fil de guidage (10) comprenant des moyens à douille (1) et des moyens d'enfichage (9) s'engageant dans lesdits moyens à douille, des moyens à verrou (13) prévus sur les moyens d'enfichage (9), et des moyens de captage (5) prévus dans lesdits moyens à douille (1) pour capter les moyens à verrou (13), caractérisé en ce qu'il comprend des moyens à ressort (11, 211, 12) prévus sur lesdits moyens d'enfichage et qui engendrent une force élastique pour pousser les moyens à verrou (13) dans les moyens de captage (5).
2. Assemblage de retenue selon la revendication 1, caractérisé en ce que les moyens élastiques (11, 211, 12) sont formés par une longueur des moyens d'enfichage (9), la force élastique résultant de ce fait de l'effort de pliage de la longueur des moyens d'enfichage (9).
3. Assemblage de retenue selon la revendication 1 ou 2, caractérisé en ce que les moyens de captage (5) sont formés par une épaulement (5) qui fait saillie à l'intérieur des moyens à douille (1).
4. Assemblage de retenue selon la revendication 3, comprenant en outre dans lesdits moyens à douille (1) des moyens formant une rampe (8) qui coopèrent avec ladite épaulement (5) pour diriger les moyens à verrou (13) vers les moyens à douille (1), à l'encontre de l'action des moyens élastiques (11, 12) et pour positionner ensuite lesdits moyens à verrou (13) dans la direction de l'épaulement (5) sous l'action desdits moyens élastiques (11, 12).
5. Assemblage de retenue selon la revendication 3 ou 4, dans lequel ladite épaulement (5) comporte une surface (6) de support desdits moyens à verrou (13), surface qui cède sensiblement auxdits moyens à verrou.
6. Assemblage de retenue selon l'une quelconque des revendications 1 à 5, comprenant en outre des moyens de butée (14)

prévus sur lesdits moyens d'enfichage (9) pour limiter l'engagement desdits moyens à verrou (13) dans les moyens à douille (1).

5

10

15

20

25

30

35

40

45

50

55

the spring force is a result of the bending strength of the length of the plug means (9).

3. A docking assembly according to claim 1 or 2, characterized in that the trap means (5) are formed by a shoulder (5) protruding on the inside of the socket means.
4. A docking assembly according to claim 3, further comprising ramp means (8) in said socket means (1) cooperating with said shoulder (5) for directing said bolt means (13) into the socket means (1) against the bias of said spring means (11, 12) and for thereafter positioning said bolt means (13) towards said shoulder (5) under the bias of said spring means (11, 12).
5. A docking assembly according to claim 3 or 4, wherein said shoulder (5) has a supporting face (6) for said bolt means (13) which is substantially way giving to said bolt means.
6. A docking assembly according to any of claims 1 to 5, further comprising abutment means (14) on said plug means (9) for limiting engagement of said bolt means (13) into said socket means (1).

#### Patentansprüche

1. Kopplungsanordnung für die Verlängerung eines Führungsdrahtes (2) mit einem Verlängerungsdraht (10), umfassend Hülsenmittel (1), Steckmittel (9) für den axialen Eingriff in die Hülsenmittel, Riegelmittel (13) an den Steckmitteln (9) und Fallenmittel (5) in den Hülsenmitteln (1) zum Ergreifen der Riegelmittel (13), dadurch gekennzeichnet, dass sie Federmittel (11, 211, 12) an den Steckmitteln umfasst, welche eine Federkraft erzeugen, um die Riegelmittel (13) in die Fallenmittel (5) zu zwingen.
2. Kopplungsanordnung nach Anspruch 1, dadurch gekennzeichnet, dass die Federmittel (11, 211, 12) von einem Abschnitt der Steckmittel (9) gebildet werden, wodurch sich die Federkraft aus der Biegefestigkeit des Abschnitts der Steckmittel (9) ergibt.
3. Kopplungsanordnung nach Anspruch 1 oder 2, dadurch gekennzeichnet, dass die Fallenmittel (5) von einer Schulter (5) gebildet werden, die an der Innenseite der Hülsenmittel vorspringt.
4. Kopplungsanordnung nach Anspruch 3, die des weiteren Rampenmittel (8) in den Hülsenmitteln (1) umfasst, welche mit der Schulter (5) zusammenwirken, um die Riegelmittel (13) gegen die Vorbelastung der Federmittel (11, 12) in die Hülsenmittel (1) zu lenken und um anschließend die Riegelmittel (13) unter der Vorbelastung der Federmittel (11, 12) zur Schulter (5) hinzubewegen.

5. Kopplungsanordnung nach Anspruch 3 oder 4, wobei die Schulter (5) eine Stützfläche (6) für die Riegelmittel (13) aufweist, die im wesentlichen die Riegelmittel vorbeilässt.

6. Kopplungsanordnung nach einem der Ansprüche 1 bis 5, die des weiteren Anschlagmittel (14) an den Steckmitteln (9) zur Begrenzung des Eingriffs der Riegelmittel (13) in die Hülsenmittel (1) umfasst.

#### Revendications

1. Assemblage de retenue pour l'extension d'un fil de guidage (2), avec un fil de guidage (10) comprenant des moyens à douille (1) et des moyens d'enfichage (9) s'engageant dans lesdits moyens à douille, des moyens à verrou (13) prévus sur les moyens d'enfichage (9), et des moyens de captage (5) prévus dans lesdits moyens à douille (1) pour capter les moyens à verrou (13), caractérisé en ce qu'il comprend des moyens à ressort (11, 211, 12) prévus sur lesdits moyens d'enfichage et qui engendrent une force élastique pour pousser les moyens à verrou (13) dans les moyens de captage (5).
2. Assemblage de retenue selon la revendication 1, caractérisé en ce que les moyens élastiques (11, 211, 12) sont formés par une longueur des moyens d'enfichage (9), la force élastique résultant de ce fait de l'effort de pliage de la longueur des moyens d'enfichage (9).
3. Assemblage de retenue selon la revendication 1 ou 2, caractérisé en ce que les moyens de captage (5) sont formés par une épaulement (5) qui fait saillie à l'intérieur des moyens à douille (1).
4. Assemblage de retenue selon la revendication 3, comprenant en outre dans lesdits moyens à douille (1) des moyens formant une rampe (8) qui coopèrent avec ladite épaulement (5) pour diriger les moyens à verrou (13) vers les moyens à douille (1), à l'encontre de l'action des moyens élastiques (11, 12) et pour positionner ensuite lesdits moyens à verrou (13) dans la direction de l'épaulement (5) sous l'action desdits moyens élastiques (11, 12).
5. Assemblage de retenue selon la revendication 3 ou 4, dans lequel ladite épaulement (5) comporte une surface (6) de support desdits moyens à verrou (13), surface qui cède sensiblement auxdits moyens à verrou.
6. Assemblage de retenue selon l'une quelconque des revendications 1 à 5, comprenant en outre des moyens de butée (14)

prévus sur lesdits moyens d'entichage (9) pour limiter l'engagement desdits moyens à verrou (13) dans les moyens à douille (1).

5

10

15

20

25

30

35

40

45

50

55



FIG. 1

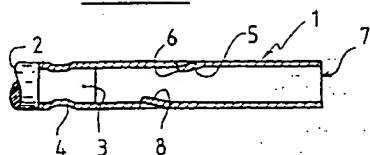


FIG. 2




FIG. 3

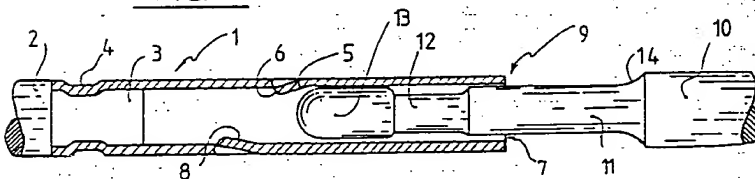


FIG. 4

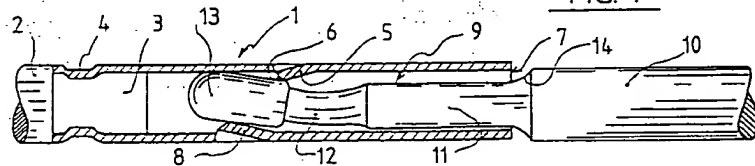


FIG. 5


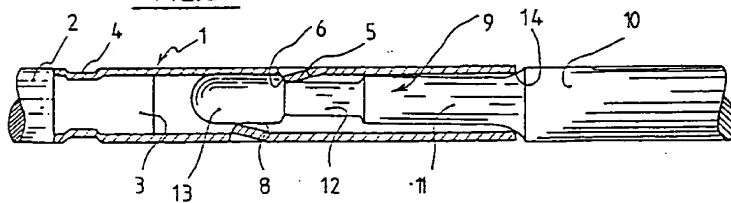


FIG. 6



**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☒ **BLACK BORDERS**

☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**

☐ **FADED TEXT OR DRAWING**

☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**

☐ **SKEWED/SLANTED IMAGES**

☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**

☐ **GRAY SCALE DOCUMENTS**

☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**

☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**

☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**